


# DUMPER

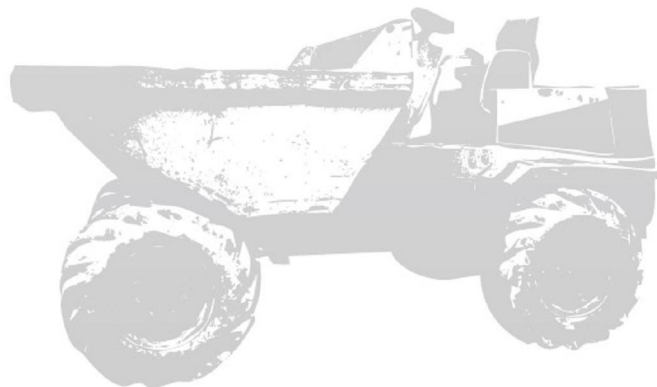

## D203

Size	Ply Rating	Load Index		Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs		Max. Speed KPH / MPH	Rim Width (inch)
		Free Rolling Wheels	Drive Wheels		co (mm)	sw (mm)			Free Rolling Wheels	Drive Wheels		
11.00-20	18	-	170	T/T	1104	293	203	145/1000	-	6000/13225	25/15	8.00

## D302



Size	Ply Rating	Load Index		Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs		Max. Speed KPH / MPH	Rim Width (inch)
		Free Rolling Wheels	Drive Wheels		co (mm)	sw (mm)			Free Rolling Wheels	Drive Wheels		
10.5/80-18	10	131	119	T/T	885	274	21.5	53/370	1950/4300	1360/3000	40/25	9.00
	10	131	119	T/L	885	274	21.5	53/370	1950/4300	1360/3000	40/25	9.00
12.5/80-18	12	142	129	T/T	965	308	21.5	53/370	2650/5840	1850/4080	40/25	9.00
	12	142	129	T/L	965	308	21.5	53/370	2650/5840	1850/4080	40/25	9.00
16	148	135	T/L	965	308	24.5	71/490	3150/6940	2180/4805	40/25	9.00	

## D303A



Size	Ply Rating	Load Index		Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs		Max. Speed KPH / MPH	Rim Width (inch)
		Free Rolling Wheels	Drive Wheels		co (mm)	sw (mm)			Free Rolling Wheels	Drive Wheels		
15.0/55-17	10	134	122	T/L	850	391	24.9	38/260	2120/4670	1500/3305	40/25	13.00
TLS [380/55-17]												
15.0/55-17	12	138	125	T/L	850	391	24.9	40/280	2360/5200	1650/3635	40/25	13.00
TLS [380/55-17]												
10.5/80-18 E9	10	123	119	T/L	885	274	22.0	53/370	1950/4300	1360/3000	40/25	9.00
12.5/80-18 E9	12	142	129	T/T	965	308	26.8	53/370	2650/5840	1850/4080	40/25	9.00
	12	142	129	T/L	965	308	26.8	53/370	2650/5840	1850/4080	40/25	9.00
405/70-24	14	-	152	T/L	1176	418	33.6	70/480	-	3550/7825	40/25	14.00

