


LIGHT TRUCK

ON THE ROAD



D102

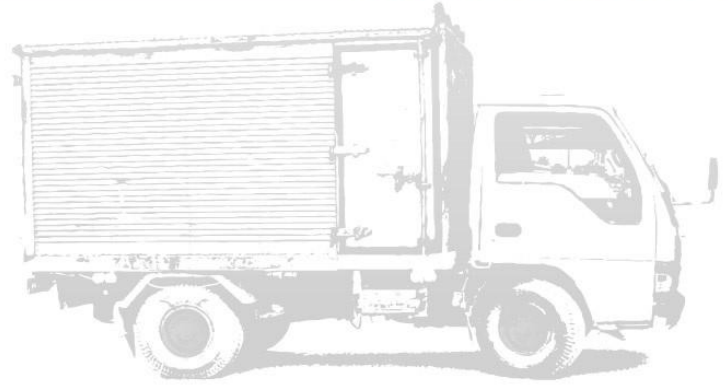

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure Single (psi/kPa)	Max. Load Single kgs / lbs	Inflation Pressure Dual kgs / lbs	Max. Load Dual kgs / lbs	Rim Width (inch)
				OD (mm)	SW (mm)						
7.00-15	10	110/105L	T/T	752	202	11.5	80 / 550	1060/2335	80 / 550	925 / 2040	5.50
				752	202						
7.50-15	12	120/118L	T/T	780	211	12.0	87 / 600	1400/3085	87 / 600	1320 / 2910	6.00
				780	211						
6.50-16	12	111/106L	T/T	755	182	9.0	95 / 660	1090/2400	95 / 660	950 / 2090	4.50
				755	182						
7.00-16	12	116/114L	T/T	776	194	12.0	83 / 575	1250/2755	83 / 575	1180 / 2600	5.50
				776	194						
7.50-16	12	121/119L	T/T	808	220	12.0	87 / 600	1450/3195	87 / 600	1360 / 3000	6.00
				808	220						
7.50-16	14	122/121L	T/T	808	220	12.0	95 / 660	1510/3305	95 / 660	1450 / 3195	6.00
				808	220						
8.25-16	16	124/122L	T/T	808	220	12.0	110 / 760	1600/3325	110 / 760	1500 / 3310	6.00
				808	220						
8.25-16	14	126/124L	T/T	854	234	12.5	85 / 590	1700/3750	85 / 590	1600 / 3525	6.50
				854	234						

D108



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure Single (psi/kPa)	Max. Load Single kgs / lbs	Inflation Pressure Dual kgs / lbs	Max. Load Dual kgs / lbs	Rim Width (inch)
				OD (mm)	SW (mm)						
7.00-16	12	116/114L	T/T	776	194	12	83 / 575	1250/2755	83 / 575	1180 / 2600	5.5
7.50-16	14 Heavy Duty	122/121G	T/T	808	220	12.3	95 / 660	1500/3305	95 / 660	1450 / 3195	6
7.50-16	12	121/119L	T/T	808	220	12.3	87 / 600	1450/3195	87 / 600	1360 / 3000	6
8.25-16	14	126/124L	T/T	854	234	12	85 / 590	1700/3750	85 / 590	1600 / 3525	6.5

D201



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure Single (psi/kPa)	Max. Load Single kgs / lbs	Inflation Pressure Dual kgs / lbs	Max. Load Dual kgs / lbs	Rim Width (inch)
				OD (mm)	SW (mm)						
7.00-15	12	114/112L	T/T	752	202	11.5	83 / 575	1180/2600	83 / 575	1120 / 2470	5.50
7.50-15	12	120/118L	T/T	780	211	12.0	87 / 600	1400/3085	87 / 600	1320 / 2910	6.00
7.50-15	14	121/119L	T/T	780	211	12.0	95 / 660	1450/3195	95 / 660	1360 / 3000	6.00
7.50-15	16	123/121L	T/T	780	211	12.0	110 / 760	1550/3415	110 / 760	1450 / 3195	6.00
7.00-16	14	118/116L	T/T	776	194	12.0	94 / 650	1320/2910	94 / 650	1250 / 2755	5.50
7.50-16	14	122/121L	T/T	808	220	12.0	95 / 660	1500/3305	95 / 660	1450 / 3195	6.00
8.25-16	14	126/124L	T/T	854	234	12.5	85 / 590	1700/3750	85 / 590	1600 / 3525	6.50

LIGHT TRUCK

